XCMG | SOLID TO SUCCEED

Techno West Verhuur
Heftrucks • Verreikers • Terminaltrekkers • Hoogwerkers

SMART CLOUD

K-Series
MOBILE ELEVATING WORK PLATFORM

XGS40ACK-Li



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XCMG | SOLID TO SUCCEED


SMART CLOUD 灵云

K-Series
MOBILE ELEVATING WORK PLATFORM


XGS40ACK-Li

Parameter

Item		Unit	XGS40ACK-Li
Dimension			
Overall machine dimensions	a.Length (stowed)	mm	14025
	Length (transportation)	mm	12500
	b.Width(Shaft retracted/extended)	mm	2490/3800
	c.height	mm	3000
Working platform dimensions	Length	mm	2400
	Width	mm	900
	Height	mm	1150
d.wheelbase(retracted/extended)		mm	4020
Performance			
Max.working height		mm	40200
Max.platform height		mm	38200
Max.working range		mm	21900
Max.lift capacity		kg	300/460
Boom variable range		°	−6.5～+75
Turntable rotation angle		°	360
Tail swing of turntable (retract/expand)		mm	2565/1910
Platform rotation angle		°	160
Jib vertical rotation – up		°	70
Jib vertical rotation – down		°	60
Total Weight		kg	19700
Driving speed (stowed)		km/h	5
Travel speed (ascent or extension)		km/h	0.5
Min.turning radius–outside(retract/expand)		m	5.8/6.8
Min.turning radius–inside(retract/expand)		m	2.4/4.4
Min.ground clearance		mm	300
Gradeability(counterweight end up)		% (°)	40(21.8)
Gradeability(counterweight end down)		% (°)	30(17)
Max.Lateral Travel Slope		% (°)	25(14)
Power source			
Tire specifications			445/50D710 Infused solid tire
Control			12V DC proportional control
Battery specification		V/Ah	76.8/608
Charger Specifications		V/Ah	80/80
Hydraulic oil tank capacity		L	260
Hydraulic system capacity		L	330

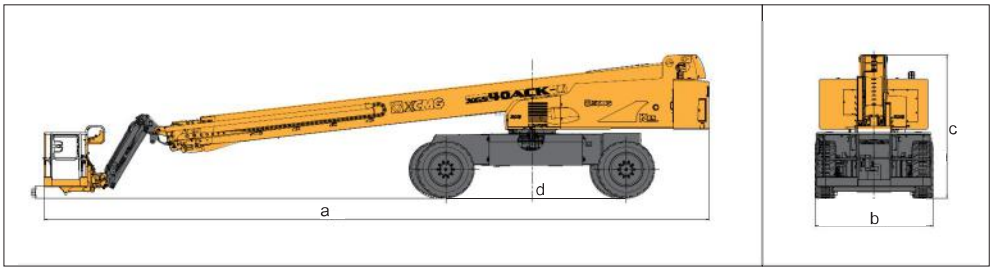

Work Curve Graph

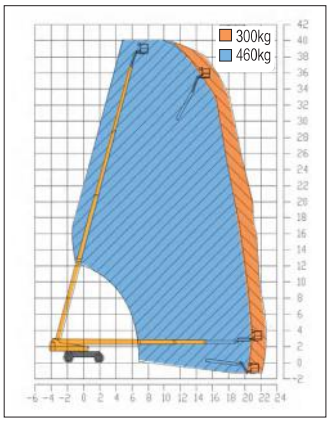

SOLID TO SUCCEED

The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.