XCMG SOLID TO SUCCEED

Techno West Verhuur
Heftrucks • Verreikers • Terminaltrekkers • Hoogwerkers

## SCISSOR LIFTS

# XG1008AC/XG1012AC




The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, paramenters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XCMG SOLID TO SUCCEED

# XG1008AC/XG1012AC

Scissor lifts


## FEATURES

### PRODUCTIVITY

2 front driving wheels
25% theoretical gradeability
Battery charge indicator and diagnostic display
Manual platform lowering value
Both platform and ground control panel with emergency stop button
Front wheel multi-disc brakes
Manual brake release
Solid non-marking tires
Mobile pothole protection
Tilt alarm
Hourmeter record
Lift and lower alarm
Horn
Dual flashing beacons
Drive alarm
Overload alarm

## OPTIONS

Platform working light
Air-line to platform
AC power to the platform
Lithium battery

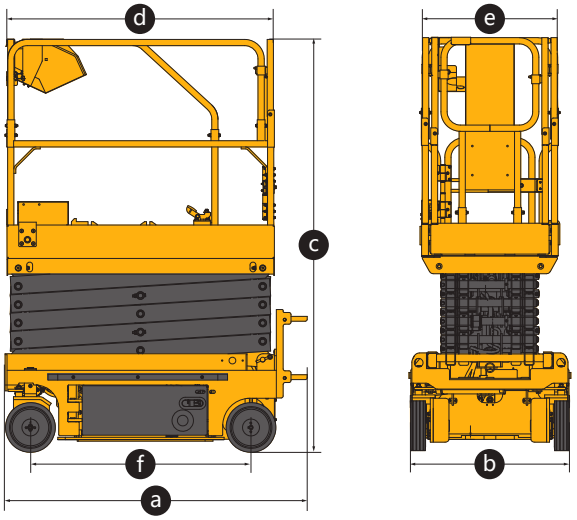


| Item | Unit | XG1008AC | XG1012AC |
|---|---|---|---|
| Lift capacity | kg | 230 | 450 |
| Lift capacity of auxiliary platform | kg | 115 | 115 |
| Occupant capacity | - | 2/1(in/out) | 2 |
| Working height | m | 10 | 10 |
| Platform height | m | 8/5.5(in/out) | 8 |
| Length of auxiliary platform | mm | 900 | 900 |
| Ground clearance (pothole protector – raised/lowered) | mm | 100/20 | 110/20 |
| Turning radius (inside/outside) | m | 0/2.3 | 0/2.3 |
| Drive motor | kW | 0.87 | 0.87 |
| Lift motor | kW | 3.3 | 3.3 |
| Drive speed (retracted/extended) | km/h | 4.0/0.8 | 4.0/0.8 |
| Lift/Lower time | s | 29~40/34~45 | 29~40/49~60 |
| Gradeability | % | 25 | 25 |
| Tilt alarm (side/forward and backward) | ° | 1.5/3 | 1.5/3 |
| Batteries | V/Ah | 4x6/280 Lead-acid (standard)<br>25.6/206 Lithium (optional) | 4x6/280 Lead-acid (standard)<br>25.6/206 Lithium (optional) |
| Charger | V/A | 24/30 | 24/30 |
| Tires | - | 381×127 | 381×127 |
| Weight | kg | 2260 | 2680 |
| a Length (without ladder) | mm | 2477(2280) | 2477(2267) |
| b Width | mm | 810 | 1170 |
| c Height (platform folded) | mm | 2335(2005) | 2335(1805) |
| d x e Platform size (Length x Width) | mm | 2280×810 | 2280×1120 |
| f Wheelbase | mm | 1877 | 1877 |

SOLID TO SUCCEED

The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, paramenters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.